


# U10 TECHNICAL DATA SHEET

(road marking machine configurable for airspray, airless, cold spray plastic 1:1, cold spray plastic 98:2; cold plastic high thickness)



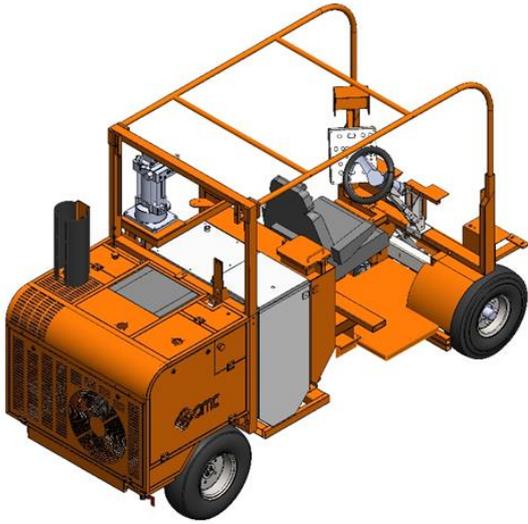


|              |                     |
|--------------|---------------------|
| <b>MODEL</b> | <b>U10</b>          |
| Dimensions   | 3125x1245x h2185 mm |

| STANDARD CONFIGURATION  |                              |
|---|------------------------------|
| Gasoline engine:  | 37 HP                        |
| Hydraulic drive with variable-flow pump                               |                              |
| Hydraulic oil cooler  |                              |
| Pressurized glass bead tank   | 100 l (max pressure 0,5 bar) |
| Electronic spacing device   |                              |
| Warning board with arrow for left/right car overtaking and 2 flashing |                              |
| Steering on front wheels  |                              |
| Seat and steering-wheel with adjustable position (right-left)         |                              |
| Sunshade roof   |                              |

Photos are not contractual.

| TECHNOLOGY   | CONFIGURATION   |
|--|---|
| COLD PAINT - AIRSPRAY  | 1 pressurized tank for paint 250 l<br>Piston air compressor 1390 l/min  |
| COLD PAINT - AIRLESS   | 1 tank for paint 270 l<br>Piston air compressor 515 l/min               |
| COLD SPRAY PLASTIC – AIRLESS RATIO 1:1                           | 2 tanks for plastic 75 l (2x)<br>Piston air compressor 515 l/min        |
| COLD SPRAY PLASTIC – AIRLESS RATIO 98:2 EXTERNAL MIXING (ONLINE) | 1 tank for plastic 270 l<br>Piston air compressor 515 l/min             |
| COLD PLASTIC HIGH THICKNESS – SHOE SYSTEM                        | 1 pressurized tank for plastic 250 l<br>Piston air compressor 827 l/min |

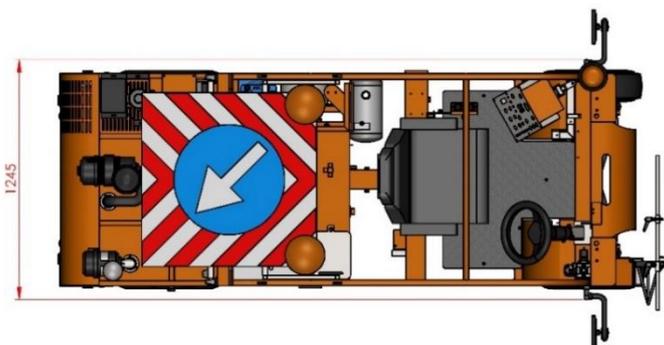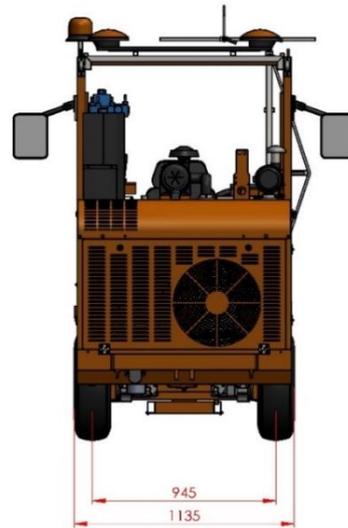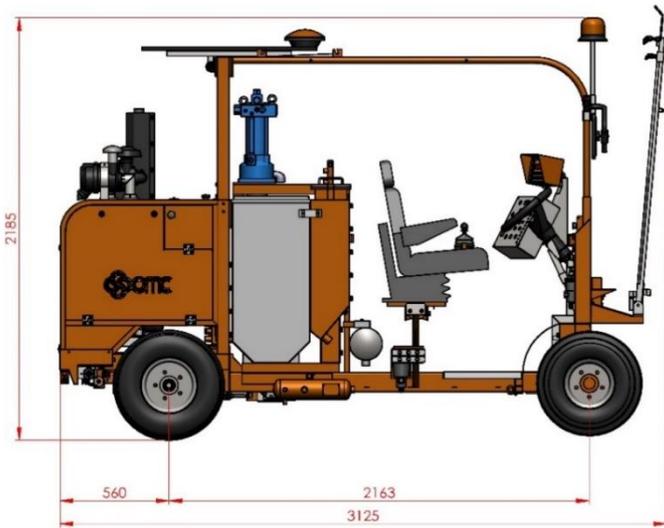

**MADE IN ITALY**




Pressurized **glass bead tank 100 l.**  
With regulator of pressure and moisture separator

**Sunshade roof**

Paint tank 270 l,  
*airless configuration*

Led beacon

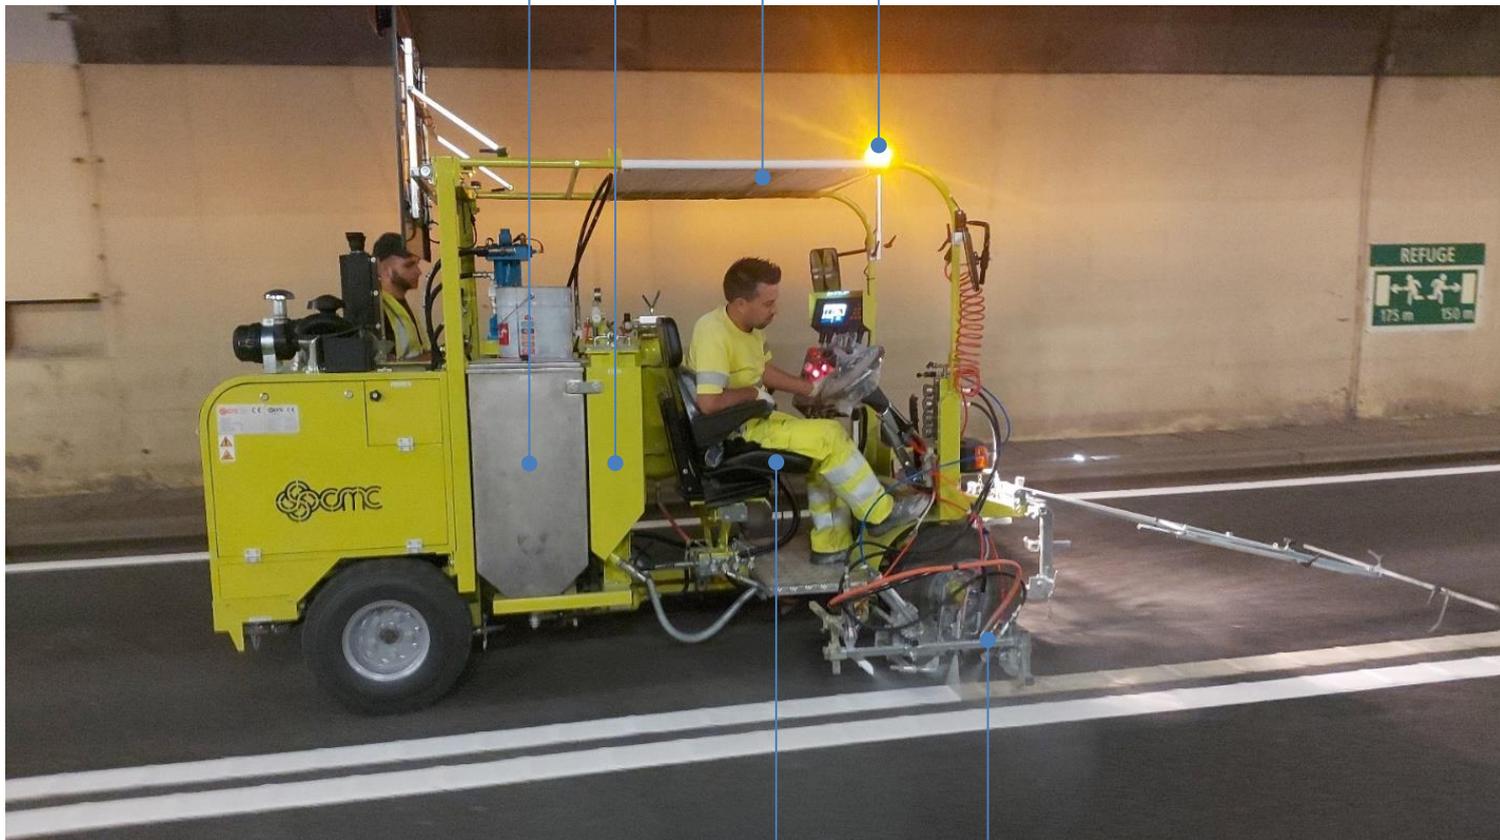


**Seat and steering-wheel**  
with adjustable position (right-left)

Side-mounted marking unit



Airless piston pump,  
*airless configuration*

Lights

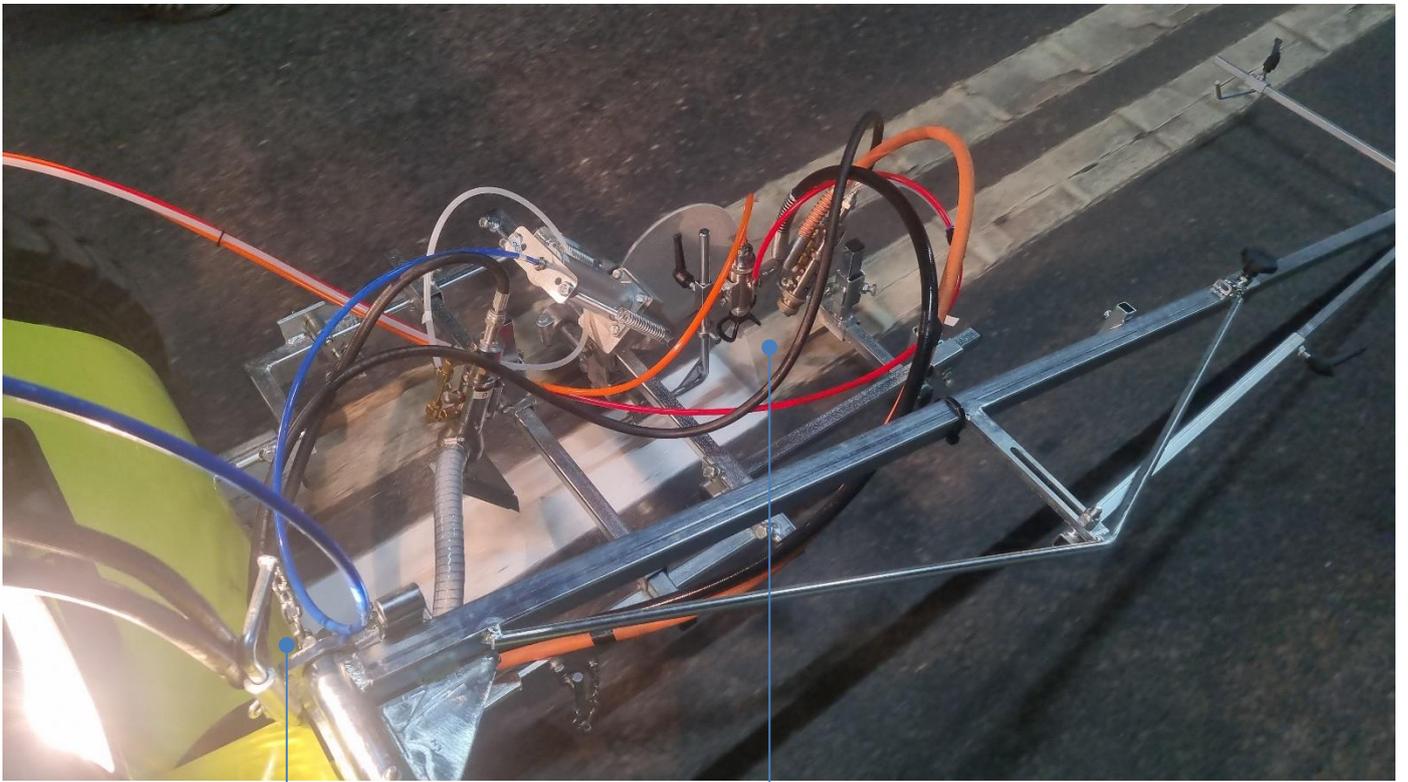

Centrally-mounted marking unit to make the central line with comfort

Marking unit for online, cold spray plastic – airless ratio 98:2 external mixing (online configuration)



Electronic spacing device

Warning board with arrow for left/right car overtaking and 2 flashing